

MIPOLAM ACCORD

gerflor.com



Gerflor[®]
theflooringgroup

MIPOLAM ACCORD



	34-43	Evercare™	100 % recyclable
--	-------	-----------	------------------



0341 Oman
NCS: 2002-Y50R / LRV: 42,9




0343 Oro
NCS: 4005-Y50R / LRV: 25,3




0344 Ospedal
NCS: 6005-Y50R / LRV: 15,1



0340 Paladru
NCS: 3500-N / LRV: 34,3

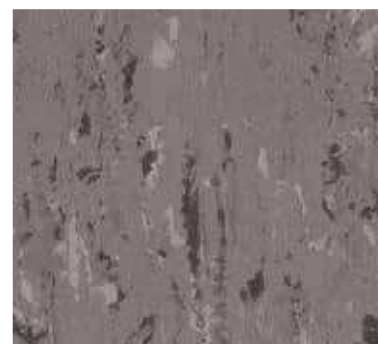

0342 Pozzolo
NCS: 5500-N / LRV: 20,4

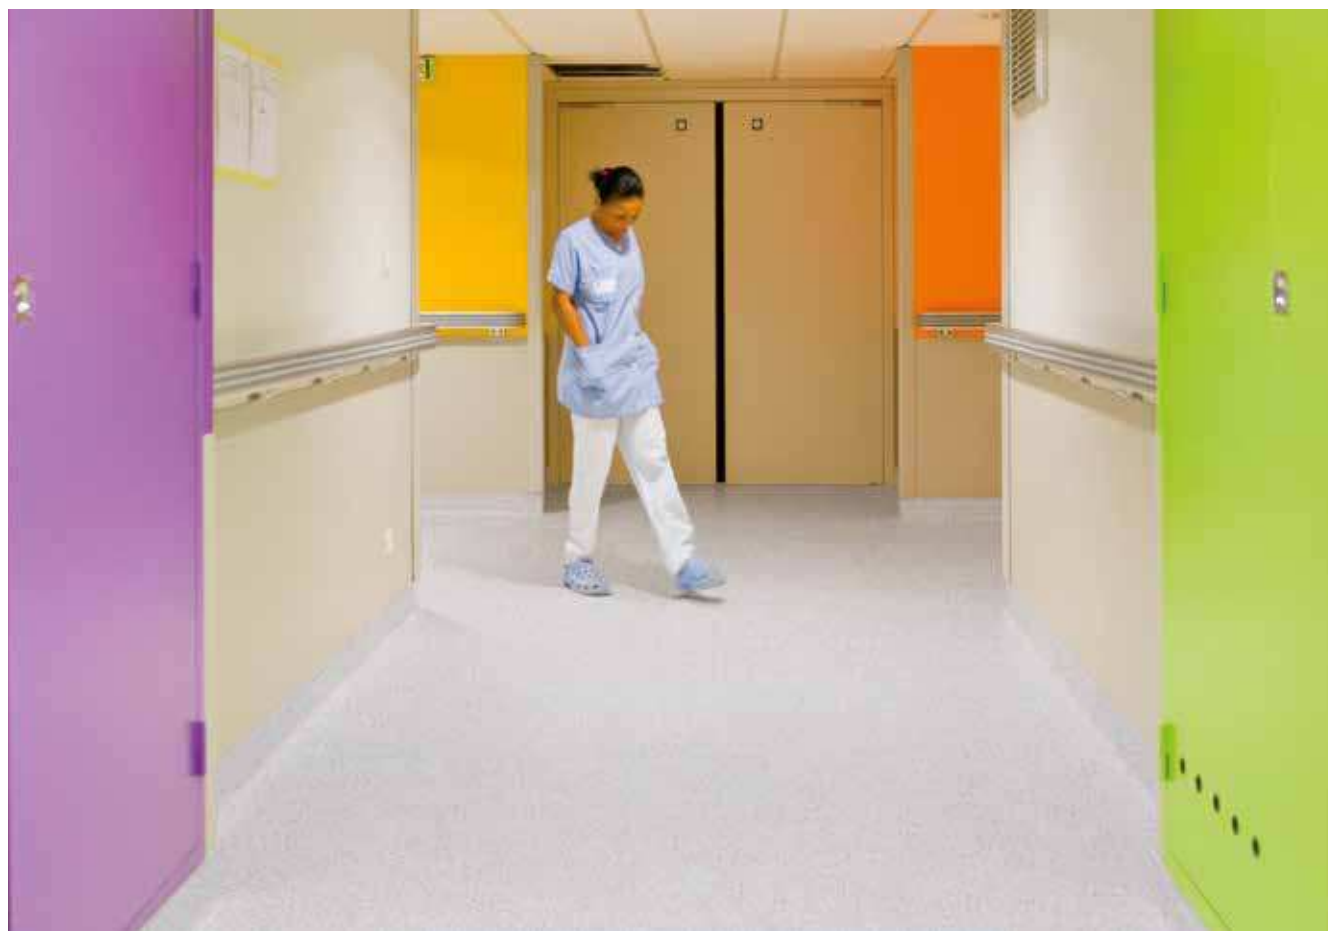

MIPOLAM ACCORD



0301 Louise
NCS: 1002-Y50R / LRV: 68,2



0321 Salt
NCS: 1002-B / LRV: 70,9



0330 Kruger
NCS: 4502-B / LRV: 27,5



0305 Light Sand
NCS: 1005-Y30R / LRV: 66,0



0312 Powell
NCS: 1502-B / LRV: 58,1



0350 Pukaki
NCS: 5502-B / LRV: 19,6



0324 Sand
NCS: 2010-Y30R / LRV: 53,3



0319 Toba
NCS: 2502-B / LRV: 43,4



0359 Michigan
NCS: 6005-R80B / LRV: 18,3



0303 Manitoba
NCS: 1005-Y50R / LRV: 66,6



0320 Ontario
NCS: 3010-R80B / LRV: 36,4




0360 Balaton
NCS: 8502-B / LRV: 7,9



Homogeneous sheet without foam backing (Compact) -  Tiles (608 x 608 mm) available for a minimum order quantity of 500m²
LRV: Light Reflectance Value

MIPOLAM ACCORD

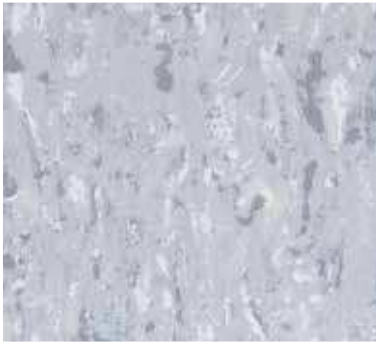


0310 Huron
NCS: 2005-R80B / LRV: 50,1



0332 Dore
NCS: 1030-Y20R / LRV: 59,4




0322 Cinto
NCS: 1050-Y / LRV: 50,0

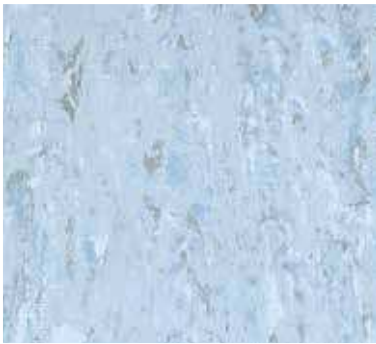

0306 Inari
NCS: 1020-R90B / LRV: 53,7




0327 Garda
NCS: 2030-G70Y / LRV: 41,1

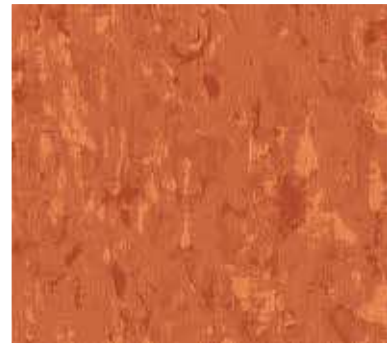


0315 Orange River
NCS: 3050-Y60R / LRV: 18,7



0316 Malaren
NCS: 3030-R90B / LRV: 32,3

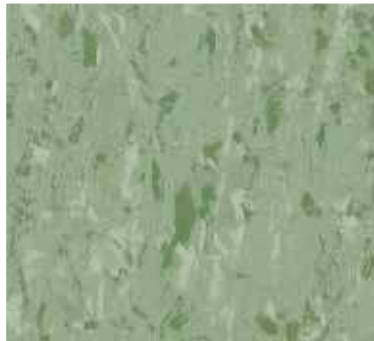

0347 Green Lake
NCS: 3030-G30Y / LRV: 30,8

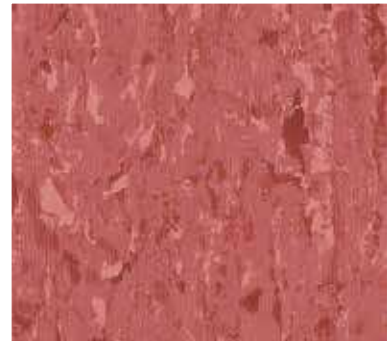


0365 Red Sea
NCS: 3040-Y90R / LRV: 18,4



0346 Roxen
NCS: 4040-R90B / LRV: 17,0



0366 Blue Wave
NCS: 3040-B / LRV: 25,0

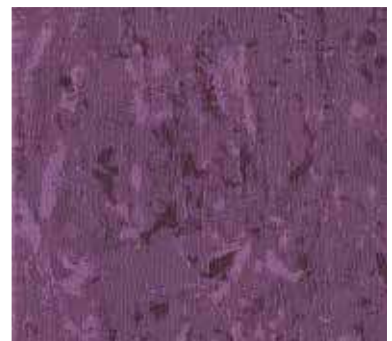


0348 Aurora
NCS: 6020-R40B / LRV: 10,4

MIPOLAM ACCORD



- ▶ High performance homogeneous flooring suitable for heavy duty traffic areas, available in sheet format.
- ▶ **Group T** wear rating compliant (very high resistance to traffic).
- ▶ Semi-directional polychrome design, available in a large choice of 29 contemporary colours.
- ▶ Modern surface with a matt finish.
- ▶ Evercare™ surface treatment: no wax for life.
- ▶ 100% recyclable.

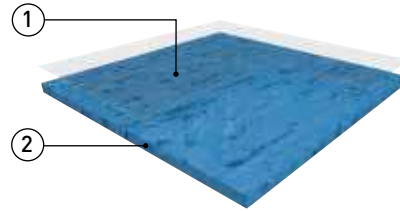

- ① evercare™ treatment
- ② Densely calendered compacted surface

MIPOLAM ACCORD is a monolayer homogeneous flooring with high PVC content calendered and pressed in 2m sheets, with a thickness of 2mm and a weight of **≤ 2850g**.

The semi-directional design with colour throughout the thickness is available in **29 references** presenting a **nice matt finish**.

This flooring is recommended for collective buildings making skirtings easier, as well as angles and welding.

The flooring is equipped with **Evercare™** the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. This Evercare™ avoids staining of chemical products used in Healthcare like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring.

This treatment has excellent maintenance characteristics and does not require the application of acrylic polishes.

The flooring is composed of minimum 25% recycled content 100% controlled and is REACH compliant.

This flooring is anti-static (<2kV) and resistant to the main chemical product used in healthcare (no impact of betadine after 24h).

The product is non reactive to residual indentation with a value $\leq 0,02$ mm (EN 433)

The flooring offers a group T wear rating suitable for heavy duty traffic areas and **Bfl-s1 fire resistance**.

The product emission rate of volatile organic compounds is $<10 \mu\text{g}/\text{m}^3$ (TVOC after 28 days ISO 16000-6).

EVERCARE™ TECHNOLOGY

AN EXCLUSIVE PATENTED TECHNOLOGY BY GERFLOR

THE BEST CHEMICAL STAIN RESISTANCE SURFACE TREATMENT

<p>Highly Durable: Exclusive surface treatment applied by UV laser cross-linking provides superior durability and an even surface thickness, creating an impenetrable barrier against stains and chemicals found in healthcare.</p> <p>Longer life expectancy.</p>	<p>evercare™ BY GERFLOR GERFLOR: EVEN THICKNESS</p>	<p>OTHER TREATED FLOOR COVERING</p> <p>COMPETITOR: MISSING TREATMENT AND UNEVEN THICKNESS</p>
<p>100% non-porous surface: The surface treatment creates a 100% non-porous barrier to all liquids and chemicals, keeping all stains floating on the surface.</p> <p>Simple and easy stain removal.</p>		

DESCRIPTION / *BESCHREIBUNG* / DESCRIPTION / *BESCHRIJVING* / DESCRIPCIÓN / *DESCRIÇÃO* / DESCRIZIONE

Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Espessura total</i> / Spessore totale	EN ISO 24346 [EN 428]	mm	2.00
Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso	EN ISO 23997 [EN 430]	g/m ²	2850
Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rollengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rollos</i> / Larghezza/lunghezza dei teli	EN ISO 24341 [EN 426]	cm/lm	200/20
Tile size / <i>Format Fliesen</i> / Format dalles / <i>Formaat der tegels</i> / Dimensiones de las losetas / <i>Dimensões dos mosaicos</i> / Dimensione delle piastre	EN ISO 24342 [EN 427]	mm	608 x 608 ⁽¹⁾
Number of tiles per package / <i>Nombre de dalles par boîte</i> / Aantal tegels per doos / Cantidad de losetas/caja / <i>Quantidade dos mosaicos/caixa</i> / N° piastre per confezione	-	-	20

CLASSIFICATION / *KLASSIFIZIERUNG* / CLASSIFICATION / *CLASSIFICATIE* / CLASIFICACIONES / *CLASSIFICAÇÕES* / CLASSIFICAZIONI

Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto	-	-	EN ISO 10581 [EN 649]
European classification / <i>Europäische Klassifizierung</i> / Classement européen / <i>Europese classificatie</i> / Europea / <i>Europeia</i> / Europea	EN ISO 10874 [EN 685]	class	34-43
Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco	EN 13501-1	class	Bfl - s1
Static electrical propensity / <i>Begehaufladung</i> / Potentiel de charge / <i>Elektrische eigenschappen</i> / Comportamiento electrostático / <i>Comportamento electrostático</i> / Resistenza elettrica	EN 1815	kV	< 2
Slip resistance wet / <i>Rutschhemmung</i> / Glissance humide / <i>Anti-slip</i> / Deslizamiento húmedo / <i>Escorregamento húmido</i> / Scivolosità umida ⁽²⁾	DIN 51130	class	R9

PERFORMANCE / *TECHNISCHE EIGENSCHAFTEN* / PERFORMANCES / *TESTRESULTAAT* / CUALIDADES TÉCNICAS / *PERFORMANCES* / CARATTERISTICHE TECNICHE

Wear resistance / <i>Verschleißverhalten</i> / Résistance à l'usure / <i>Slijtvastheid</i> / Abrasión / <i>Abrasão</i> / Resistenza all'abrasione	EN 660.2	mm ³	≤ 2.0
Wear group / <i>Verschleißgruppe</i> / Groupe d'abrasion / <i>Groep slijtvastheid</i> / Grupo de abrasión / <i>Grupo de abrasão</i> / Gruppo di abrasione	[EN 649]	group	T
Type binder content / <i>Bindenmittelgehalt</i> / Teneur en agent liant	ISO 10581	Type	I
Dimensional stability / <i>Maßstabilität</i> / Stabilité dimensionnelle / <i>Maatvastheid</i> / Estabilidad dimensional / <i>Estabilidade dimensional</i> / Stabilità dimensionale	EN ISO 23999 [EN 434]	%	Sheet ≤ 0.40 tile ≤ 0.25
Impact sound insulation / <i>Trittschallverbesserungsmaß</i> / Isolation acoustique / <i>Geluidsisolatie</i> / Acústica / <i>Acústica</i> / Isolamento acustico	EN ISO 717-2	dB	4
Residual indentation / <i>Resteindruck</i> / Poinçonnement statique rémanent / <i>Indrukbelasting</i> / Punzonamiento / <i>Punçoamento</i> / Impronta	EN ISO 24343-1 [EN 433]	mm	~ 0.02
Castor chair test / <i>Stuhlrollenbeanspruchung</i> / Essai de la chaise à roulettes / <i>Rolweerstand bureaustoelen</i> / Determinación del efecto de una silla con ruedas / <i>Resistência a cadeiras de rodas</i> / Resistenza al passaggio di sedie con rotelle (Type W / Typ W)	ISO 4918 [EN 425]	-	OK
Thermal conductivity / <i>Wärmeleitfähigkeit</i> / Conductivité thermique / <i>Thermische weerstand</i> / Resistencia térmica / <i>Resistência térmica</i> / Resistenza termica	EN ISO 10456 [EN12524]	W/(m.K)	0.25
Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce	EN 20 105 - B02	degree	> 6
Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superfície</i> / Trattamento di superficie	-	-	Evercare™
Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici	EN ISO 26987 [EN 423]	class	OK <i>ständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung.</i>
Anti-bacterial activity [E. coli - S. aureus - MRSA] ⁽³⁾	ISO 22196	-	> 99 % inhibits growth

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days / <i>TVOC (28 Tage)</i> / TVOC (28 jours) / <i>TVOC (28 dagen)</i> / TVOC (28 dias) / <i>TVOC (28 dias)</i> / TVOC (28 giorni)	ISO 16000-6	µg/m ³	< 10
Certification	-	-	Floorscore™

CE marking / *CE Kennzeichnung* / Marquage CE / *EG-conformiteitsmerk* / Marca de conformidad CE / *Marca de conformidade CE* / Marcatura CE di conformita

CE	EN 14041	-	
----	----------	---	--

(1) Products available in tiles for a minimum quantity order of 500 sqm. (2) For lifetime sustainable wet resistance, please refer to Tarasafe ranges. (3) The implementation of an effective cleaning regime is the most important defence against infection.

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleaner, or auto scrubber machine with an appropriate pad.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

Further installation and maintenance instructions are available from Gerflor.



Committed to sustainable development

Gerflor. Don't forget our complementary ranges!



Handrails



Wall Coverings & Protections



Entrance mats



Skirtings & Profiles

Gerflor
theflooringgroup