


Technical specifications



Aluminium profile

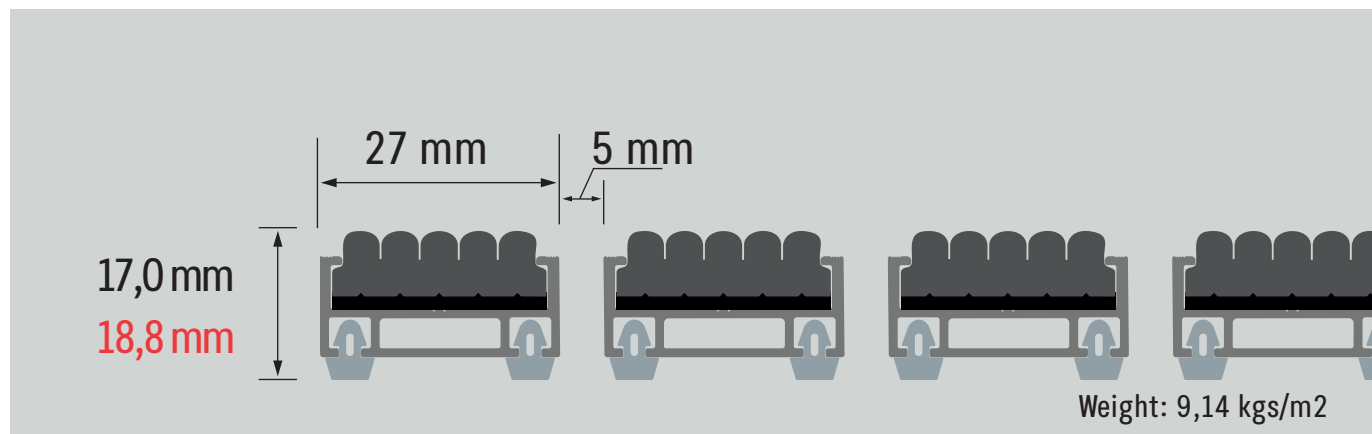

Composition: 6063 aluminium alloy with T.5 treatment

Weight: 219 grammes / linear meter

Plastic-hinge connection system between profiles




Composition: High strength polyamide

Acoustic isolation



Composition: PVC

Carpet upper insert

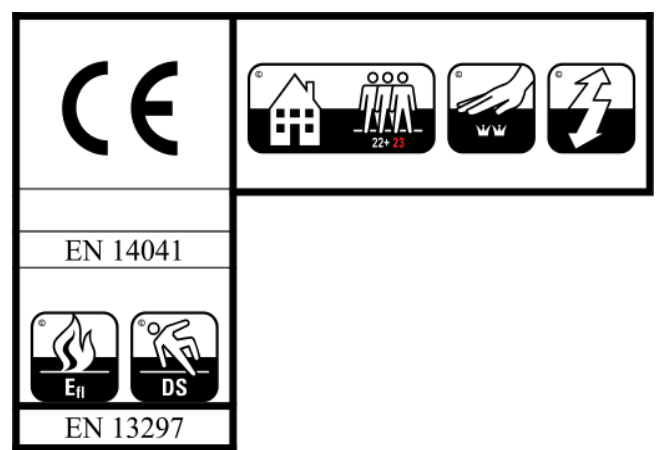

Manufacturing process:	"Needled pile floorcovering"	ISO 2424
Surface aspect:	Looped	
Pile yarn composition:	100 % PP (polypropylene)	
Backing:	"Waffle"	ISO 2424
Pile weight:	1150 gr / m ² 1750 gr / m ²	
Total weight:	2170 gr / m ² (+/- 7,5 %) 2780 gr / m ² (+/- 7,5 %)	ISO 8543 ISO 8543
Pile height:	3,6 mm (< 7: +/- 0,5 % / >= 7: +/- 7,5 %) 5,5 mm (+/- 0,5 %)	
Total height:	9,2 mm (< 7: +/- 0,5 % / >= 7: +/- 7,5 %) 11 mm (+/- 0,5 %)	ISO 1766 ISO 1766

(*) Versión "heavy duty"