

Suitable for a high level of transit + Exclusively suitable for indoor use

Typical uses: medium-sized companies / supermarkets, etc...

Description: Highly durable roll-up mat, total height is of 17mm, composed of aluminium profiles with an upper insert of carpet, whose principle of action is as follows: dust particles, small stones, and moisture become detached from the footwear, they get deposited between the profiles of the doormat, and in this way they are trapped. Every so often it will suffice to simply roll up the mat and remove the captured dirt accumulated in the matwell in which it is housed. It can be manufactured to any size or shape specification. It is supplied completely finished, and does not require any type of installation or adjustment. It provides an exclusive look to building entrances

Cleaning: Cleaning intervals should be established according to traffic. However, our general recommendations are:
 Cleaning every three days: vacuum or sweep the surface of the carpet
 Biweekly cleaning: roll up the carpet and collect the accumulated dirt in the matwell
 Monthly cleaning: clean with pressurized water

Connection system between profiles: Innovative plastic-hinge connection system between profiles. This allows the mat to be easily rolled up, in order to facilitate both its handling and the collection of the retained dirt which has built up in the matwell in which it is housed. In addition, it is perforated, to allow the evacuation of dust and moisture


Acoustic isolation: Highly effective 2.5 mm-thick piece of rubber inserted by mechanical means into both ends of the bottom of each profile. This prevents metallic noises that would occur each time the doormat is stepped on there were no such system

Upper insert: Highly resistant carpet with great moisture absorption capacity. The colour is never affected by dirt. It is available both in standard and "heavy duty" versions
 Possibility of reproducing corporate logos that reflect the identity of a brand or company

End sections: The edge of the mat is finished off with an aluminium end section which will be cut down as required, therefore any front to back size can be achieved. (some sizes will be achieved without the need for these end sections)

Colours Standard: grey, anthracite, beige, tobacco and red "Heavy duty": grey, black, brown, blue, red, yellow, green and white [page 17](#)

Accessories: An optional profile can be supplied for the construction of the frame

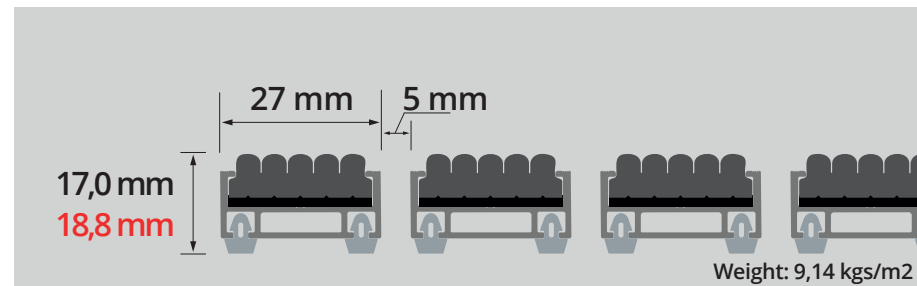

Aluminium profile



Composition: 6063 aluminium alloy with T.5 treatment
Weight: 219 grammes / linear meter

Plastic-hinge connection system between profiles



Composition: High strength polyamide

Acoustic isolation




Composition: PVC

Carpet upper insert



Manufacturing process: "Needled pile floorcovering" ISO 2424
Surface aspect: Looped
Pile yarn composition: 100 % PP (polypropylene)
Backing: "Waffle" ISO 2424
Pile weight: 1150 gr / m²
 1750 gr / m²
Total weight: 2170 gr / m² (+/- 7,5 %) ISO 8543
 2780 gr / m² (+/- 7,5 %) ISO 8543
Pile height: 3,6 mm (< 7: +/- 0,5 % / >= 7: +/- 7,5 %) ISO 1766
 5,5 mm (+/- 0,5 %)
Total height: 9,2 mm (< 7: +/- 0,5 % / >= 7: +/- 7,5 %) ISO 1766
 11 mm (+/- 0,5 %) ISO 1766

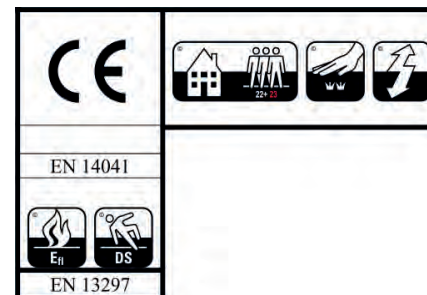

(*) Versión "heavy duty"