


Aluminium profile



**Composition:** 6063 aluminium alloy with T.5 treatment  
**Weight:** 262 grammes / linear meter

Joint between profiles

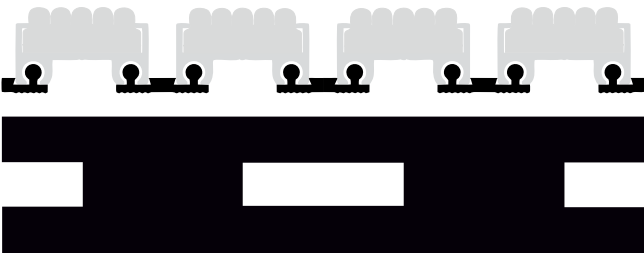

**Composition:** Plasticised PVC of SHORE A95 hardness  
**Weight:** 80 grammes / linear meter  
**Drainage perforations:** 6x22 mm  
Distance between perforations: 22mm

Carpet upper insert



**Manufacturing process:** "Needled pile floorcovering" ISO 2424

**Surface aspect:** Looped

**Pile yarn composition:** 100 % PP ( polypropylene )


**Backing:** "Waffle" ISO 2424

**Pile weight:** 1150 gr / m<sup>2</sup>  
1750 gr / m<sup>2</sup>

**Total weight:** 2170 gr / m<sup>2</sup> ( +/- 7,5 % ) ISO 8543  
2780 gr / m<sup>2</sup> ( +/- 7,5 % ) ISO 8543

**Pile height:** 3,6 mm ( < 7: +/- 0,5 % / >= 7: +/- 7,5 % )  
5,5 mm ( +/- 0,5 % )

**Total height:** 9,2 mm ( < 7: +/- 0,5 % / >= 7: +/- 7,5 % ) ISO 1766  
11 mm ( +/- 0,5 % ) ISO 1766

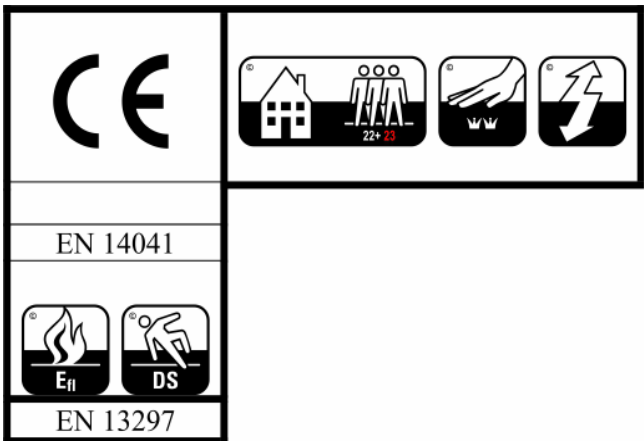

( \* ) "heavy duty"